

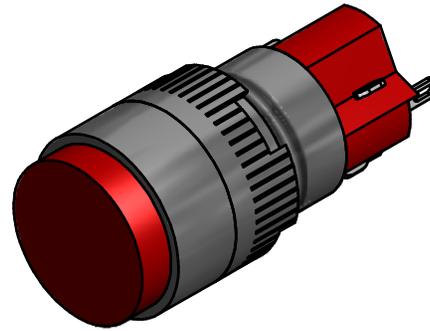
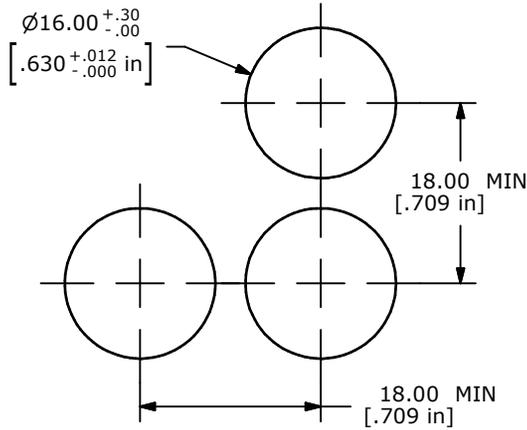



ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040006	D16EER11
2	1	F050115	ROUND FLAT RED



**B** PANEL MOUNTING.  
 .5-5.0  $[\ .020-.197 \text{ in}]$  THICK PANEL



**B** TERMINALS A AND B ARE INCLUDED FOR MECHANICAL SUPPORT ONLY.

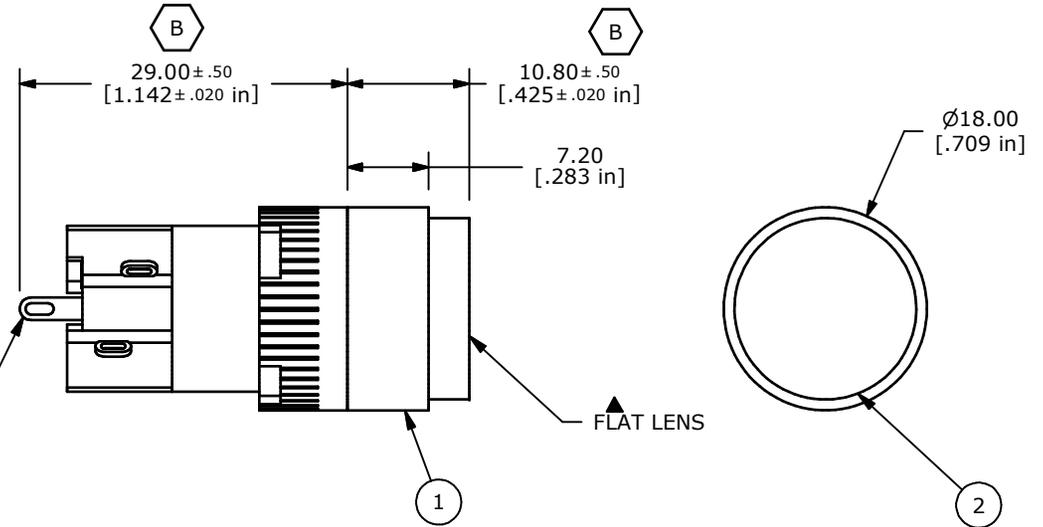

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
 X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY **B**
4. ELECTRICAL LIFE: 50,000 OPERATIONS
5. INSULATION RESISTANCE: 1,000 MΩ MIN.
6. OPERATING TEMP.: -25°C to 70°C
- ▲ 7. LAMP VOLTAGE: NO LAMP
8. CONTACT RATING: 5A @ 250 VAC  
 6A @ 24 VDC **B**  
 8A @ 125 VAC
9. ▲ DENOTES CRITICAL PARAMETER.
10. CONTACT RESISTANCE: 20 mΩ (INITIAL) **B**
11. INGRESS PROTECTION: IP40 **B**
12. 2002/95/EC (ROHS) COMPLIANT **B**
13. ACTUATION FORCE: 300g **B**



B	21015	MAKE NOTED CORRECTIONS	2/8/13	EBP
A	15353	RELEASED FOR PRODUCTION	10/3/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE D16EER110RED				
SCALE 2:1	DATE 10/3/2005	DR PH	DWG XF0647P	REV B