



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### DESCRIPTION

The ICPL0600, ICPL0601 and ICPL0611 devices each consist of an infrared emitting diode, optically coupled to a high speed integrated photo detector logic gate with a strobable output.

These devices belong to Isocom Compact Range of Optocouplers.

### FEATURES


- Half Pitch 1.27mm
- High Speed 10Mbit/s
- 10kV/μs min. Common Mode Transient Immunity (ICPL0611)
- High AC Isolation voltage 3750V<sub>RMS</sub>
- Guaranteed Performance from -40°C to 85°C
- Wide Operating Temperature Range -40°C to 100°C
- Logic Gate Output
- Pb Free and RoHS Compliant
- Halogen Free
- Safety Approvals Pending

### APPLICATIONS

- Line Receivers, Data Communication
- LSTTL to TTL, LSTTL or 5V CMOS
- Data Multiplexing
- Pulse Transformer Replacement
- Switch Mode Power Supplies
- Ground Loop Elimination
- Computer Peripheral Interface

### ORDER INFORMATION

- Add T&R after PN for Surface Mount Tape & Reel

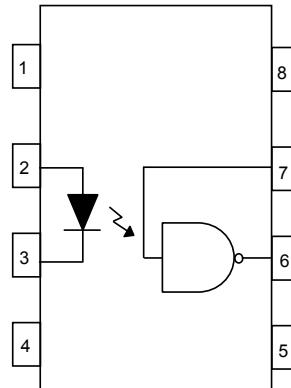

1. No Connection
2. Anode
3. Cathode
4. No Connection
5. Gnd
6. Vout
7. VE
8. V<sub>CC</sub>

A 0.1μF bypass capacitor must be connected between pins 8 and 5.

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

#### Input Diode

Forward Current	20mA
Reverse Voltage	5V
Power dissipation	40mW

#### Output

Output Current	50mA
Output Voltage	7.0V
Supply Voltage	7.0V
Enable Input Voltage (maximum 500mV above V <sub>CC</sub> )	5.5V
Enable Input Current	5mA
Power Dissipation	85mW

#### Total Package

Isolation Voltage	3750V <sub>RMS</sub>
Operating Temperature	-40 to 100 °C
Storage Temperature	-55 to 125 °C
Lead Soldering Temperature (10s)	260°C

#### ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West, Park View Industrial Estate  
Hartlepool, Cleveland, TS25 1UD, United Kingdom  
Tel: +44 (0)1429 863 609 Fax : +44 (0)1429 863 581  
e-mail: sales@isocom.co.uk  
<http://www.isocom.com>

#### ISOCOM COMPONENTS ASIA LTD

Hong Kong Office,  
Block A, 8/F, Wah Hing Industrial mansion,  
36 Tai Yau Street, San Po Kong, Kowloon, Hong Kong.  
Tel: +852 2995 9217 Fax : +852 8161 6292  
e-mail: sales@isocom.com.hk



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### Truth Table (Positive Logic)

Input	Enable	Output
H	H	L
L	H	H
H	L	H
L	L	H
H	NC	L
L	NC	H

### ELECTRICAL CHARACTERISTICS ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ unless otherwise specified)

#### INPUT

Parameter	Symbol	Test Condition	Min	Typ.*	Max	Unit
Forward Voltage	$V_F$	$I_F = 10\text{mA}$		1.4	1.8	V
Reverse Voltage	$V_R$	$I_R = 10\mu\text{A}$	5.0			V
Temperature Coefficient of $V_F$	$\Delta V_F/\Delta T_A$	$I_F = 10\text{mA}$		-1.8		$\text{mV}^\circ\text{C}$
Input Capacitance	$C_{IN}$	$V_F = 0\text{V}, f = 1\text{MHz}$		60		pF

#### OUTPUT

Parameter	Symbol	Test Condition	Min	Typ.*	Max	Unit
High Level Supply Current	$I_{CCH}$	$I_F = 0\text{mA}, V_E = 0.5\text{V}, V_{CC} = 5.5\text{V}$			10	mA
Low Level Supply Current	$I_{CCL}$	$I_F = 10\text{mA}, V_{CC} = 5.5\text{V}$			13	mA
High Level Enable Current	$I_{EH}$	$V_E = 2.0\text{V}, V_{CC} = 5.5\text{V}$			-1.6	mA
Low Level Enable Current	$I_{EL}$	$V_E = 0.5\text{V}, V_{CC} = 5.5\text{V}$			-1.6	mA
High Level Enable Voltage	$V_{EH}$	$I_F = 10\text{mA}, V_{CC} = 5.5\text{V}$	2.0			V
Low Level Enable Voltage	$V_{EL}$	$I_F = 10\text{mA}, V_{CC} = 5.5\text{V}$			0.8	V

\* Typical values at  $T_A = 25^\circ\text{C}$



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### ELECTRICAL CHARACTERISTICS ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ unless otherwise specified)

#### COUPLED

Parameter	Symbol	Test Condition	Min	Typ.*	Max	Unit
High Level Output Current	$I_{OH}$	$V_{CC} = 5.5\text{V}$ , $V_E = 2.0\text{V}$ , $V_O = 5.5\text{V}$ , $I_F = 250\mu\text{A}$			100	$\mu\text{A}$
Low Level Output Voltage	$V_{OL}$	$V_{CC} = 5.5\text{V}$ , $V_E = 2.0\text{V}$ , $I_F = 5\text{mA}$ , $I_{OL} = 13\text{mA}$			0.6	V
Input Threshold Current	$I_{FT}$	$V_{CC} = 5.5\text{V}$ , $V_E = 2.0\text{V}$ , $V_O = 0.6\text{V}$ , $I_{OL} = 13\text{mA}$			5	$\text{mA}$

### Switching Characteristics ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $V_{CC} = 5\text{V}$ , $I_F = 7.5\text{mA}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.*	Max	Unit
Propagation Delay Time to Output High Level	$t_{PHL}$	$C_L = 15\text{pF}$ , $R_L = 350\Omega$ , $T_A = 25^\circ\text{C}$		35	75	ns
Propagation Delay Time to Output Low level	$t_{PLH}$	$C_L = 15\text{pF}$ , $R_L = 350\Omega$ , $T_A = 25^\circ\text{C}$		45	75	ns
Pulse Width Distortion	$ t_{PHL}-t_{PLH} $	$C_L = 15\text{pF}$ , $R_L = 350\Omega$		10	35	ns
Output Rise Time	$t_r$	$C_L = 15\text{pF}$ , $R_L = 350\Omega$		30	40	ns
Output Fall Time	$t_f$	$C_L = 15\text{pF}$ , $R_L = 350\Omega$		10	20	ns
Enable Propagation Delay Time to Output High Level	$t_{ELH}$	$I_F = 7.5\text{mA}$ , $V_{EL} = 0\text{V}$ , $V_{EH} = 3\text{V}$ , $C_L = 15\text{pF}$ , $R_L = 350\Omega$		30	40	ns
Enable Propagation Delay Time to Output Low Level	$t_{EHL}$			20	30	ns

\* Typical values at  $T_A = 25^\circ\text{C}$



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### ELECTRICAL CHARACTERISTICS ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ unless otherwise specified)

#### Switching Characteristics ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $V_{CC} = 5\text{V}$ , $I_F = 7.5\text{mA}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.*	Max	Unit
Common Mode Transient Immunity at Logic High	CM <sub>H</sub>	ICPL0600 (Fig 14) $I_F = 0\text{mA}$ , $V_{OH} = 2\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 10\text{Vp-p}$ , $T_A = 25^\circ\text{C}$				V/ $\mu\text{s}$
		ICPL0601 (Fig 14) $I_F = 0\text{mA}$ , $V_{OH} = 2\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 50\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	5000			
		ICPL0611 (Fig 14) $I_F = 0\text{mA}$ , $V_{OH} = 2\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 400\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	10000			
		ICPL0611 (Fig 15) $I_F = 0\text{mA}$ , $V_{OH} = 2\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 400\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	15000			
Common Mode Transient Immunity at Logic Low	CM <sub>L</sub>	ICPL0600 (Fig 14) $I_F = 7.5\text{mA}$ , $V_{OL} = 0.8\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 10\text{Vp-p}$ , $T_A = 25^\circ\text{C}$				V/ $\mu\text{s}$
		ICPL0601 (Fig 14) $I_F = 7.5\text{mA}$ , $V_{OL} = 0.8\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 50\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	5000			
		ICPL0611 (Fig 14) $I_F = 7.5\text{mA}$ , $V_{OL} = 0.8\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 400\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	10000			
		ICPL0611 (Fig 15) $I_F = 7.5\text{mA}$ , $V_{OL} = 0.8\text{V}$ , $R_L = 350\Omega$ , $V_{CM} = 400\text{Vp-p}$ , $T_A = 25^\circ\text{C}$	15000			

\* Typical values at  $T_A = 25^\circ\text{C}$



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

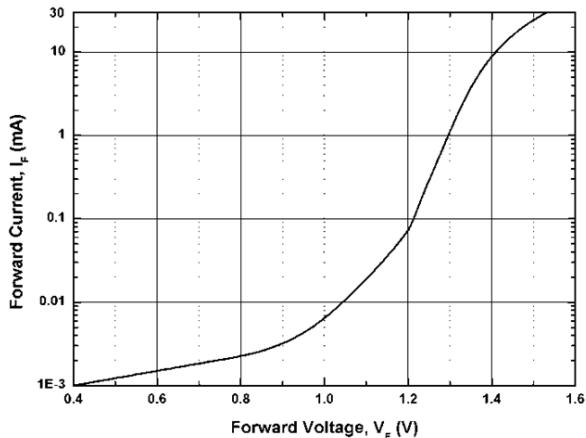


Fig 1 Forward Current vs Forward Voltage

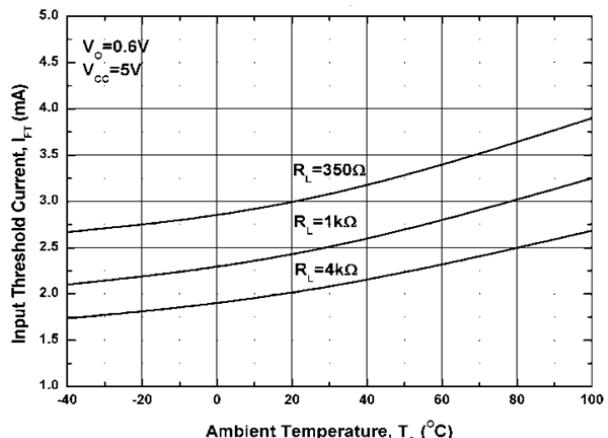


Fig 2 Input Threshold Current vs  $T_A$

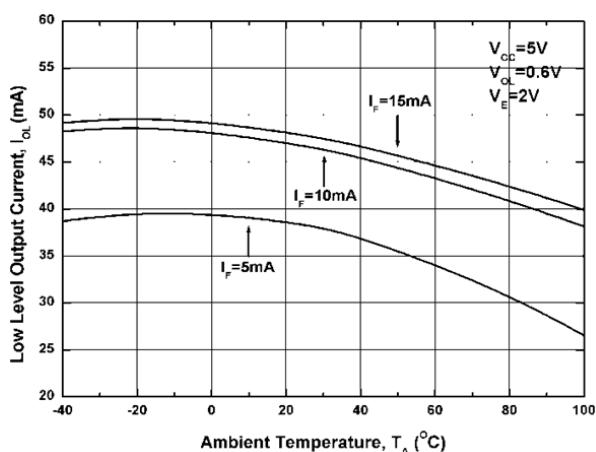


Fig 3 Low Level Output Current vs  $T_A$

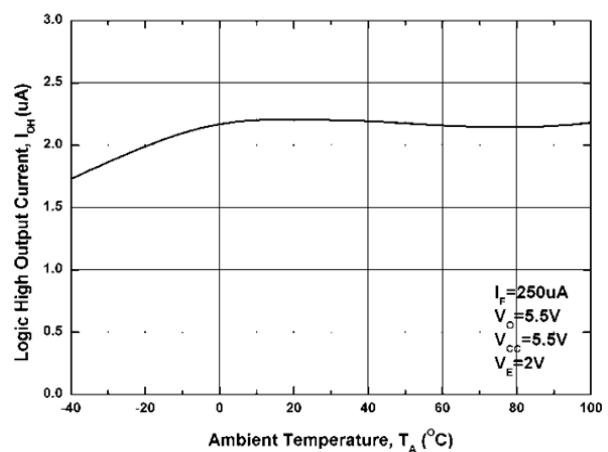


Fig 4 High Level Output Current vs  $T_A$

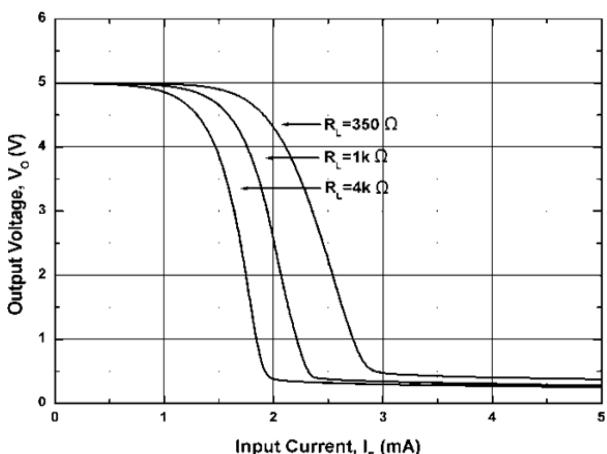


Fig 5 Output Voltage vs Input Forward Current

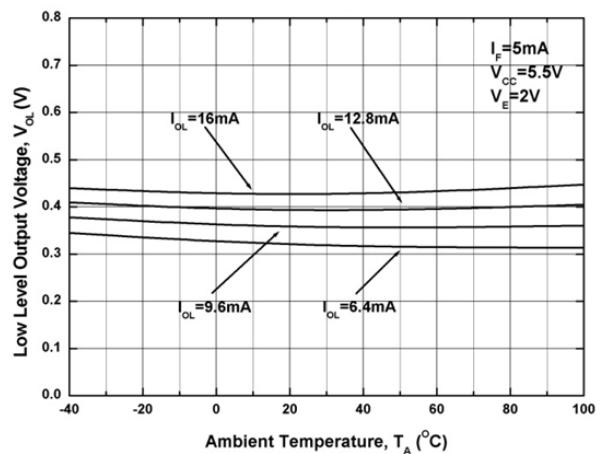


Fig 6 Low Level Output Voltage vs  $T_A$



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

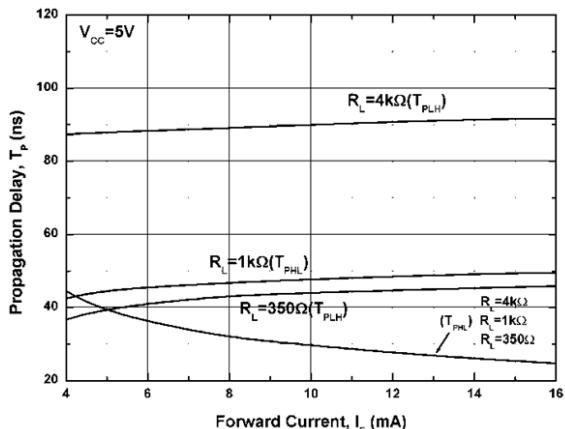


Fig 7 Propagation Delay Time vs Forward Current

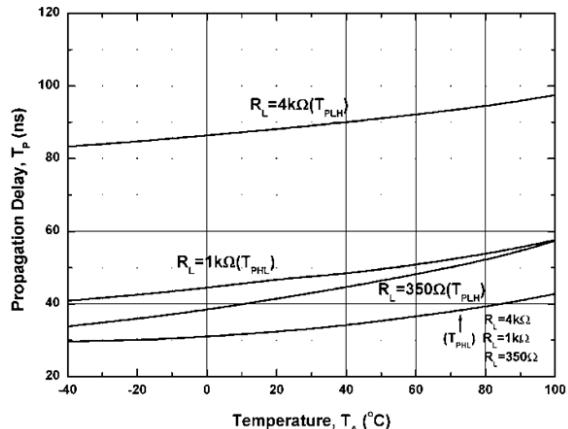


Fig 8 Propagation Delay Time vs  $T_A$

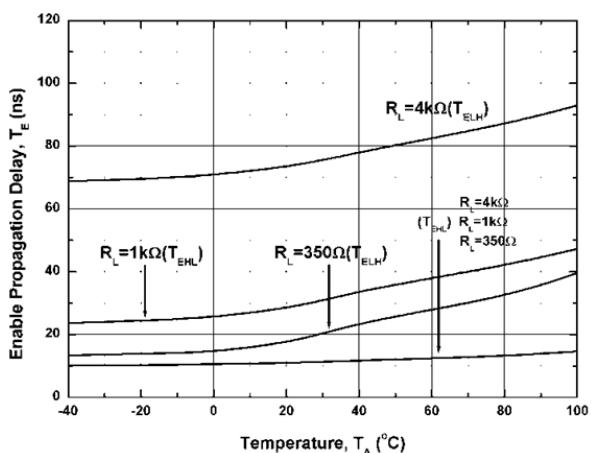


Fig 9 Enable Propagation Delay Time vs  $T_A$

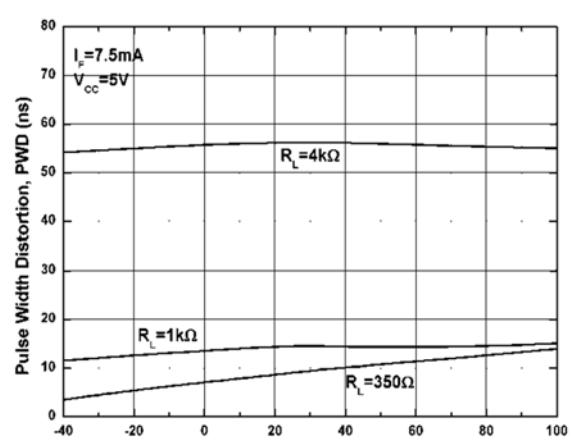


Fig 10 Pulse Width Distortion vs  $T_A$

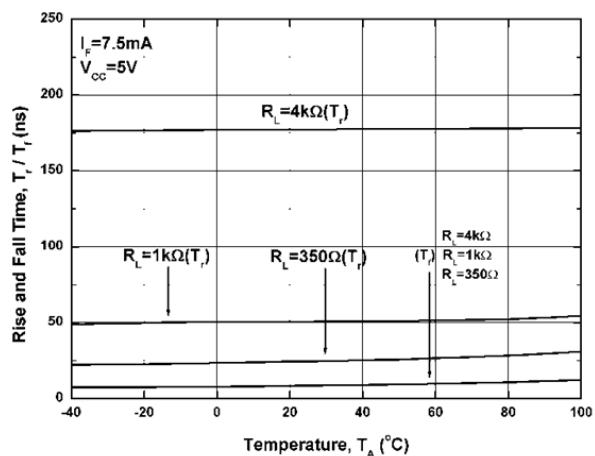


Fig 11 Rise Time / Fall Time vs  $T_A$



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

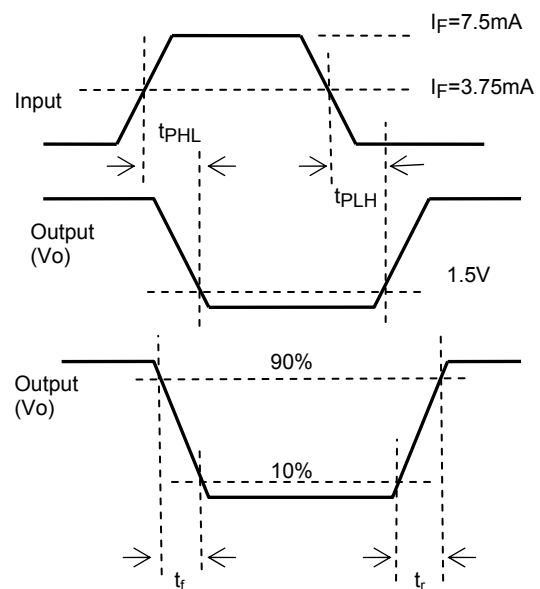
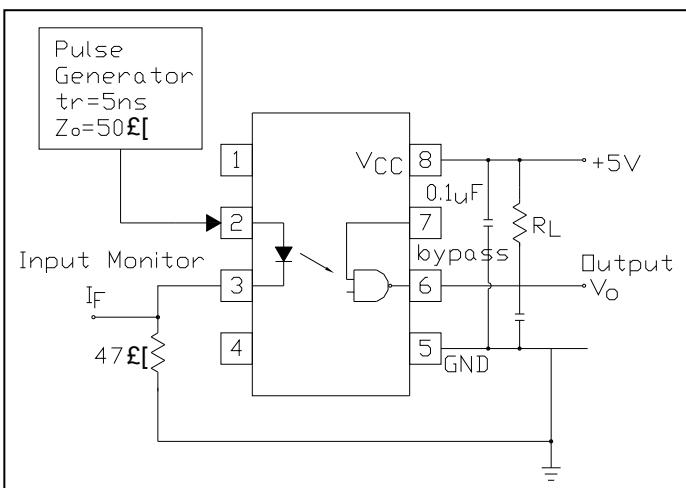


Fig 12  $t_{PHL}$ ,  $t_{PLH}$ ,  $t_f$  and  $t_f$  Test Circuit


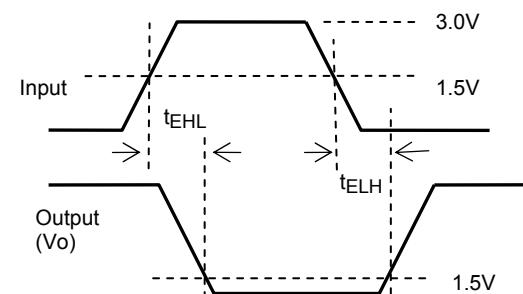


Fig 13  $t_{EHL}$  and  $t_{ELH}$  Test Circuit

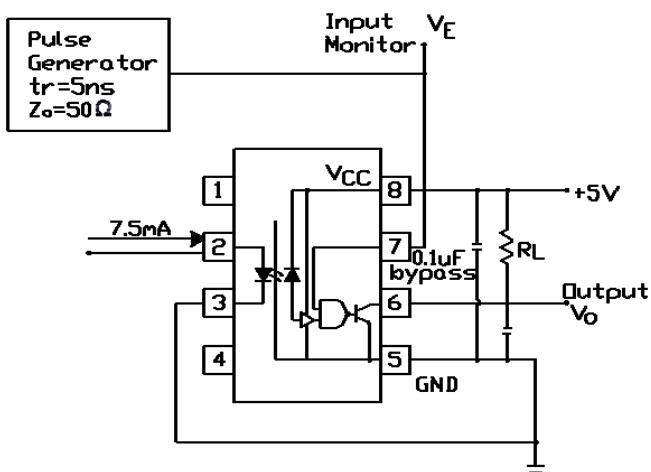

**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

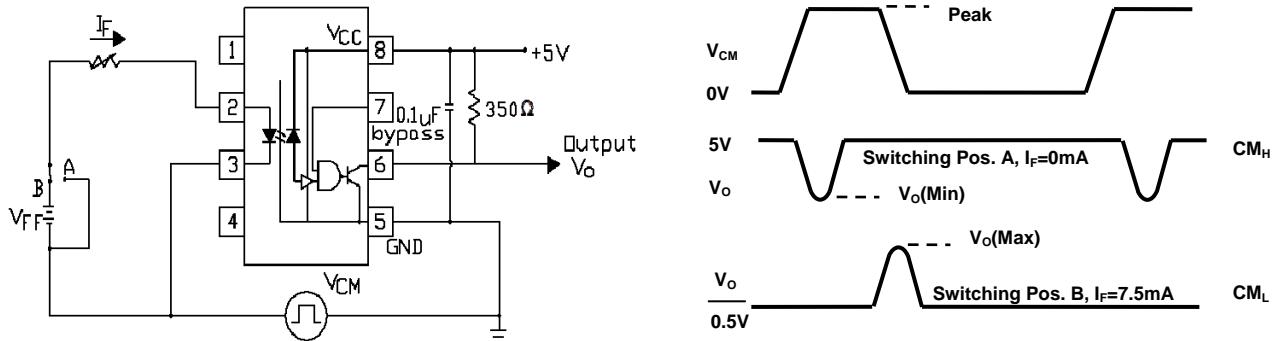


Fig 14 Common Mode Transient Immunity Test Circuit

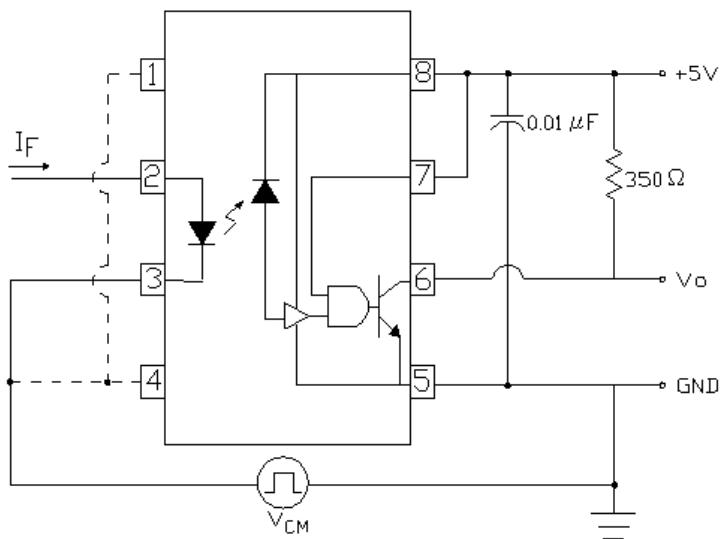


Fig 15 High Common Mode Transient Immunity Test Circuit

Common mode transient immunity in logic high level is the maximum tolerable (positive)  $dV_{CM}/dt$  on the leading edge of the common mode pulse signal  $V_{CM}$ , to assure that the output will remain in a logic high state (i.e.,  $V_O > 2.0V$ ).

Common mode transient immunity in logic low level is the maximum tolerable (negative)  $dV_{CM}/dt$  on the trailing edge of the common mode pulse signal,  $V_{CM}$ , to assure that the output will remain in a logic low state (i.e.,  $V_O < 0.8V$ ).



## ICPL0600 / ICPL0601 / ICPL0611

### Notes:

- The  $V_{CC}$  supply must be bypassed by a  $0.1\mu F$  capacitor or larger with good high frequency characteristic and should be connected as close as possible to the package  $V_{CC}$  and GND pins.
- Enable Input – No pull up resistor required as the device has an internal pull up resistor.
- $t_{PLH}$  is measured from the 3.75mA level on the HIGH to LOW transition of the input current pulse to the 1.5 V level on the LOW to HIGH transition of the output voltage pulse.
- $t_{PHL}$  is measured from the 3.75mA level on the LOW to HIGH transition of the input current pulse to the 1.5 V level on the HIGH to LOW transition of the output voltage pulse.
- $t_r$  Rise time is measured from the 10% to the 90% levels on the LOW to HIGH transition of the output pulse.
- $t_f$  Fall time is measured from the 90% to the 10% levels on the HIGH to LOW transition of the output pulse.
- $t_{ELH}$  is measured from the 1.5V level on the HIGH to LOW transition of the input Enable voltage pulse to the 1.5V level on the LOW to HIGH transition of the output voltage pulse.
- $t_{EHL}$  is measured from the 1.5V level on the LOW to HIGH transition of the input Enable voltage pulse to the 1.5V level on the HIGH to LOW transition of the output voltage pulse.
- $CM_H$ — The maximum tolerable rate of rise of the common mode voltage to ensure the output will remain in the HIGH state (i.e.,  $V_O > 2.0V$ ).
- $CM_L$ — The maximum tolerable rate of rise of the common mode voltage to ensure the output will remain in the LOW output state (i.e.,  $V_O < 0.8V$ ).



**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### ORDER INFORMATION

ICPL0600, ICPL0601, ICPL0611



After PN	Description	Packing quantity
None	Surface Mount Tube Packaging	100 pcs per tube
T&R	Surface Mount Tape & Reel	2000 pcs per reel




**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### PACKAGE DIMENSIONS (mm)

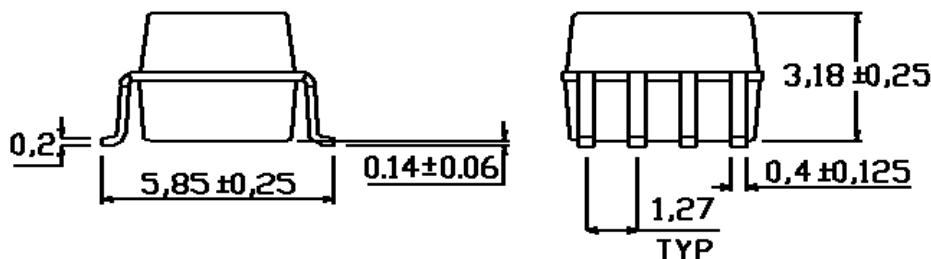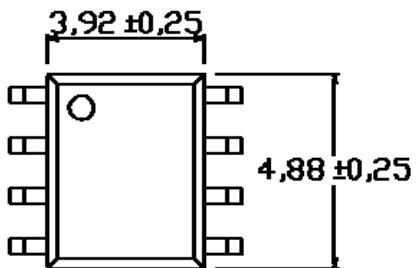

### Recommended Solder Pad Layout (mm)

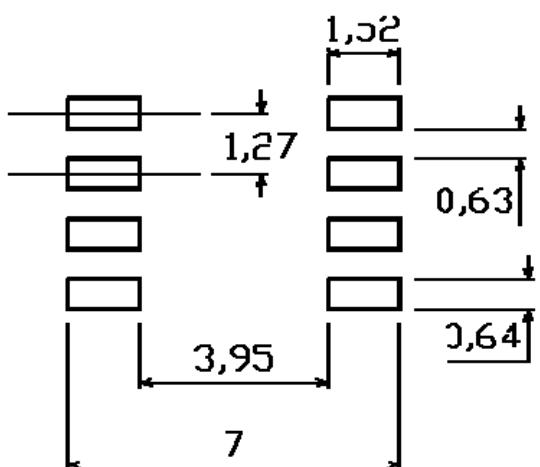




**ISOCOM**  
COMPONENTS


## ICPL0600 / ICPL0601 / ICPL0611

### Device Marking (Example ICPL0600)

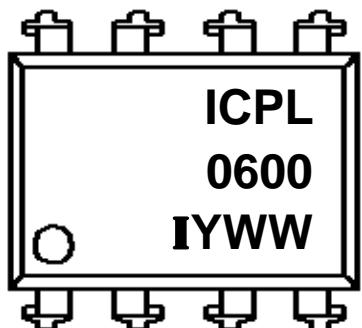

ICPL0600 denotes Device Part Number  
Y denotes 1 digit Year code  
WW denotes 2 digit Week code  
I denotes Isocom

### REFLOW SOLDERING TEMPERATURE PROFILE


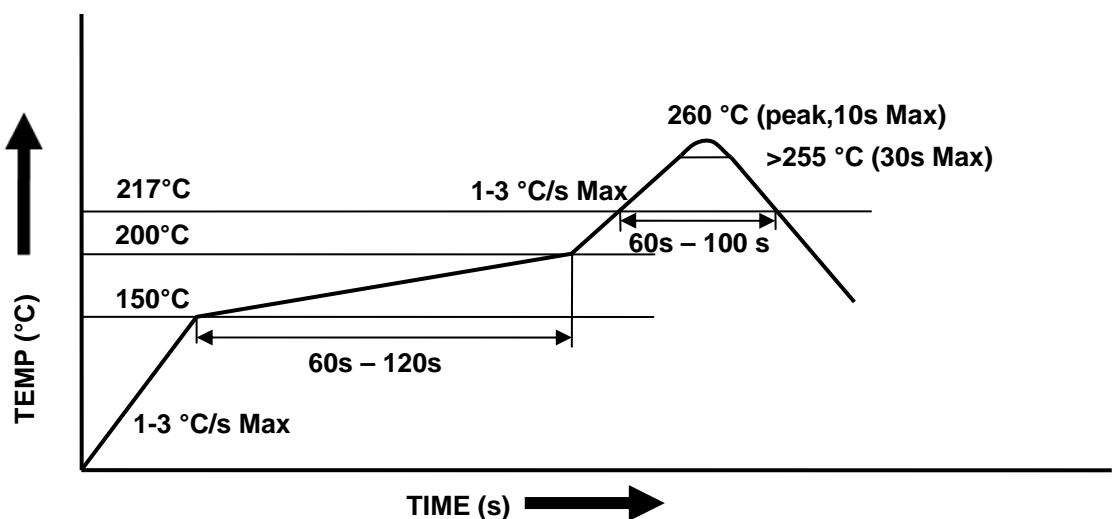





**ISOCOM**  
COMPONENTS

## ICPL0600 / ICPL0601 / ICPL0611

### Tape and Reel Packaging

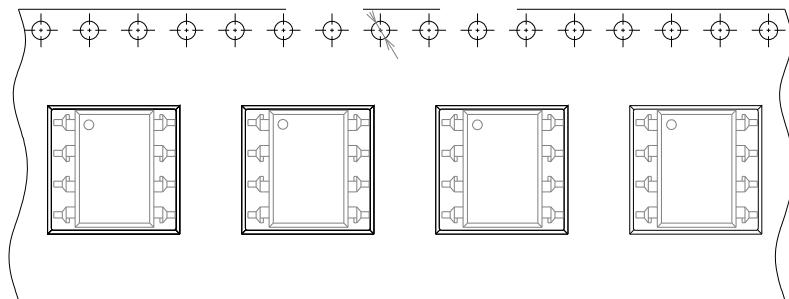

Direction of feed from reel

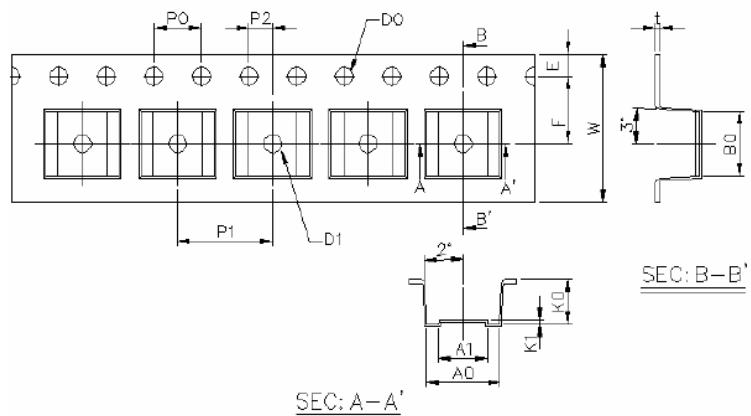

Dimension No.	A0	A1	B0	D0	D1	E	F
Dimension (mm)	6.2±0.1	4.1±0.1	5.28±0.1	1.5±0.1	1.5±0.3	1.75±0.1	5.5±0.1
Dimension No.	P0	P1	P2	t	W	K0	K1
Dimension (mm)	4.0±0.1	8.0±0.1	2.0±0.1	0.4±0.1	12.0 +0.3/-0.1	3.7±0.1	0.3±0.1